(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date 28 October 2004 (28.10.2004)

(10) International Publication Number WO 2004/092026 A1

(51) International Patent Classification7: B65D 5/18, 71/00

(21) International Application Number:

PCT/NL2004/000218

(22) International Filing Date:

1 April 2004 (01.04.2004)

(25) Filing Language:

Dutch

(26) Publication Language:

English

(30) Priority Data: 1023073

1 April 2003 (01.04.2003) NI.

(71) Applicant (for all designated States except US): HEINEKEN TECHNICAL SERVICE B.V. [NL/NL]; 2e Weteringplantsoen 21, NL-1017 ZD Amsterdam (NL).

(72) Inventor; and


- (75) Inventor/Applicant (for US only): KRUIT, Jan, Peter [NL/NL]; Dreef 3, NL-2803 HA Gouda (NL).
- (74) Agent: WINCKELS, J., H., R.; Nieuwe Parklaan 97, NL-2587 BN Den Haag (NL).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of

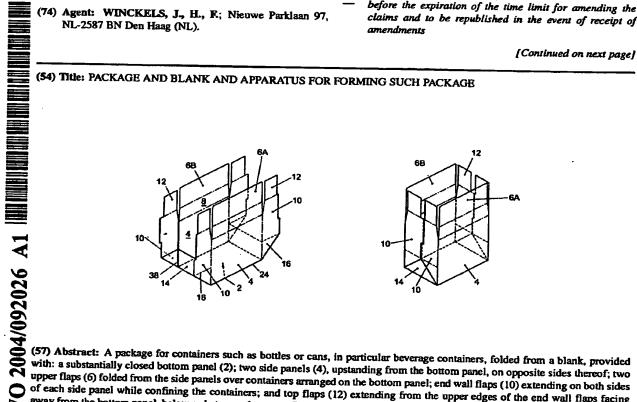



upper flaps (6) folded from the side panels over containers arranged on the bottom panel; end wall flaps (10) extending on both sides of each side panel while confining the containers; and top flaps (12) extending from the upper edges of the end wall flaps facing away from the bottom panel, below or between the upper flaps (6); wherein at least said two flaps (12) and/or the upper flaps (6) are attached to each other.